

WORKBENCH TIER DRAWER INSTALLATION INSTRUCTIONS

—IMPORTANT—

PRODUCT LIABILITY INFORMATION

Read all instructions before proceeding with installation or drawer loading. Vital product information pertaining to proper set-up and cautions are included. Failure to follow these instructions may cause failure which may result in personal injury or property damage.

3002 N. Burdick Street

Kalamazoo, MI 49004

t: 800-748-0227 f: 269-342-4161

www.borroughs.com

RETAIN THIS MANUAL FOR FUTURE REFERENCE



Table of Contents

Before You Begin : **3**

Tier Drawer: **4**

Warranty : **8**

1. Check your inventory to be sure you received your entire order; refer to the Parts List on the following pages. If there are any missing or damaged parts, contact the **Borroughs Customer Service Manager @ 1-800-748-0227**.
2. Read and understand the entire installation instructions prior to beginning the install.
3. Some applications **DO NOT** utilize all the holes in components, or all the fasteners supplied, refer to illustrations for specifics.
4. The estimated time to complete the assembly is **30 minutes** with (2) people.

Tools Required



Phillips Head Screwdriver




Tape Measure

Hardware Supplied

A

14933-00


Screw 1/4-20 x 3/4



B

11209-00

Lag Screw 1/4 x 1




C

07849-00

Washer 1/4"






Parts List		
Item	Description	Qty
1	Drawer Assembly	1
2	Inner Brackets	2
3	Outer Brackets	2
	Hardware Bag Steel Top, contains (10) A screws	1
	Hardware Bag Wood Top, contains (6) B screw and (6) C washers	1

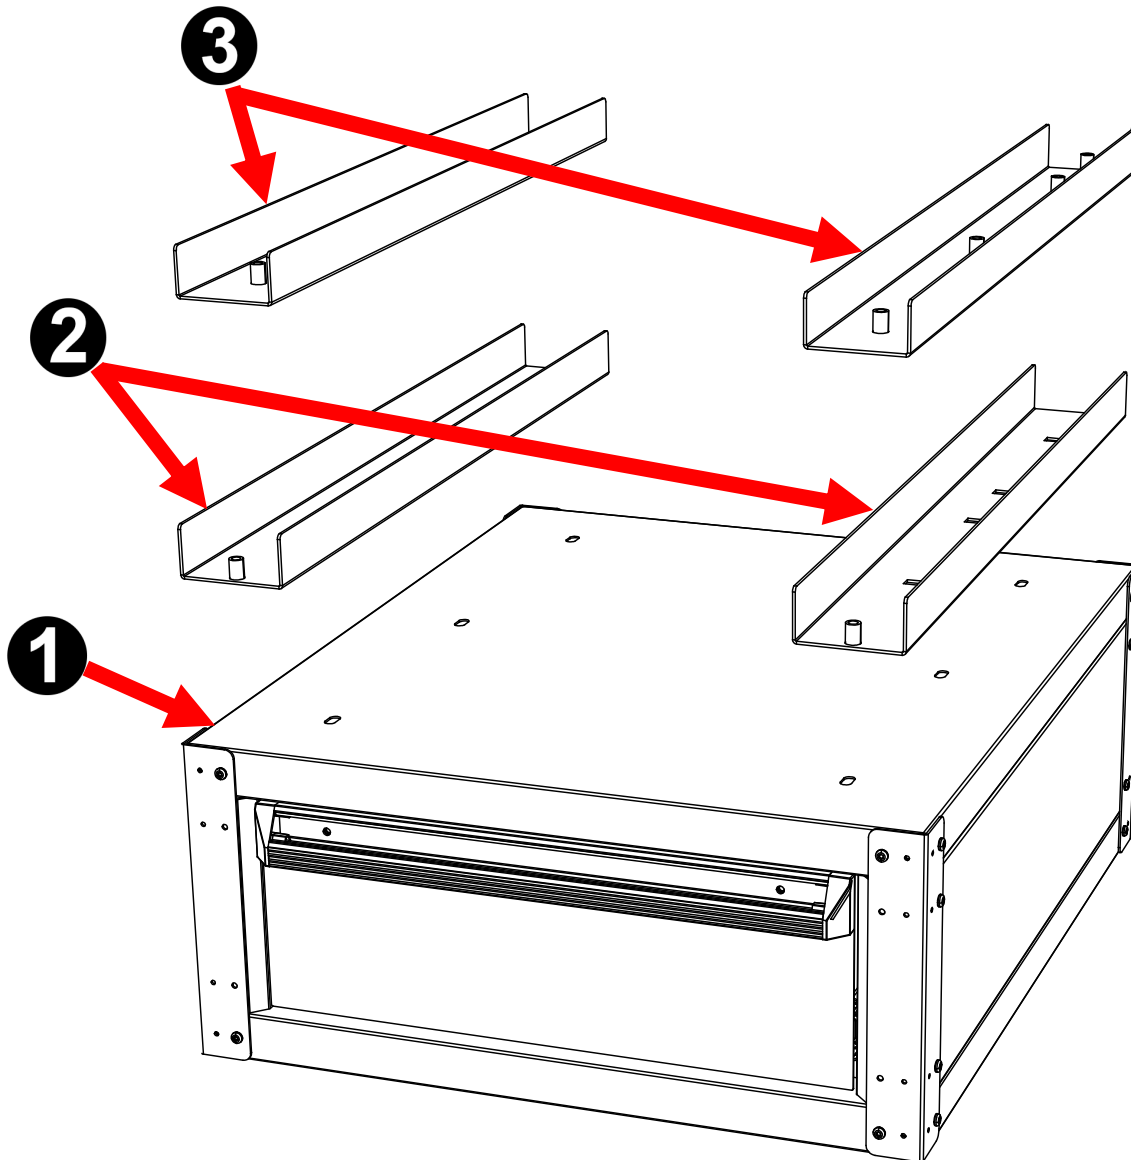


Workbench Tier Drawer

- 1** Starting with the workbench upside down, attach the inner and out brackets to the bottom side of the bench top with (4) **A** screws. Space brackets 18 inches apart outside to outside. The inner channels will attach to the to the front side of the bench top. Leave all hardware hand tight at this time. If you are installing the tier drawer on a hardwood top, no brackets will be supplied or needed.

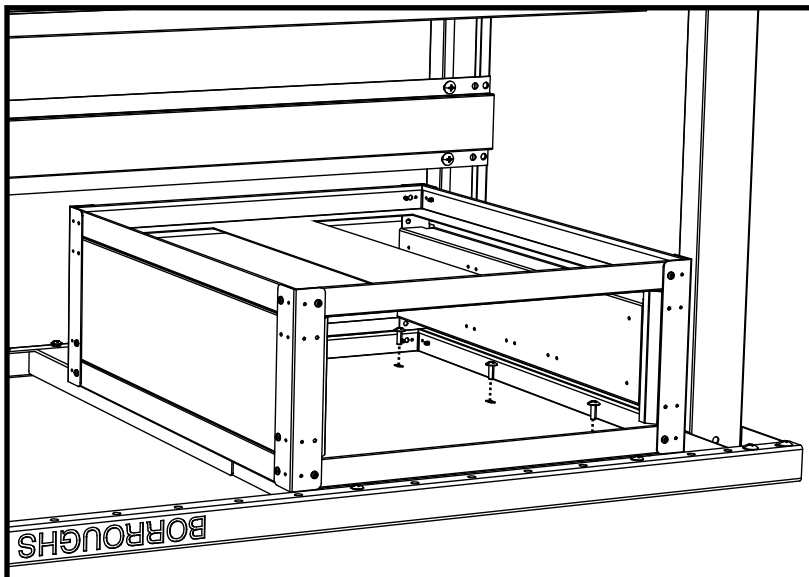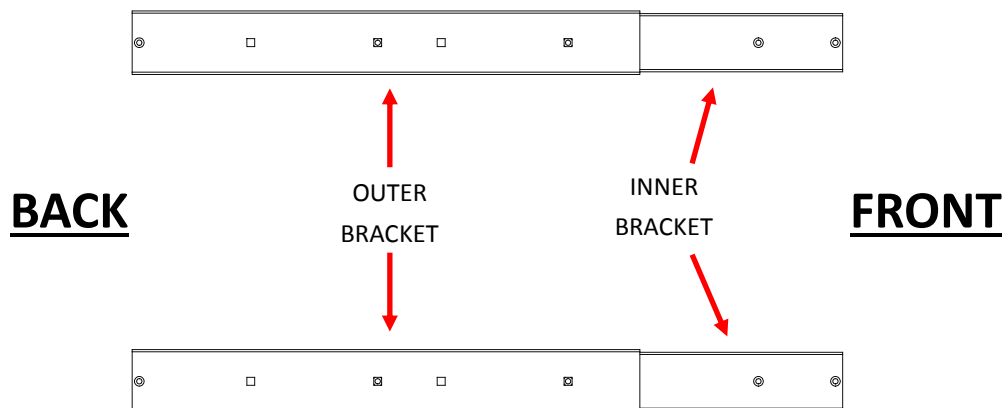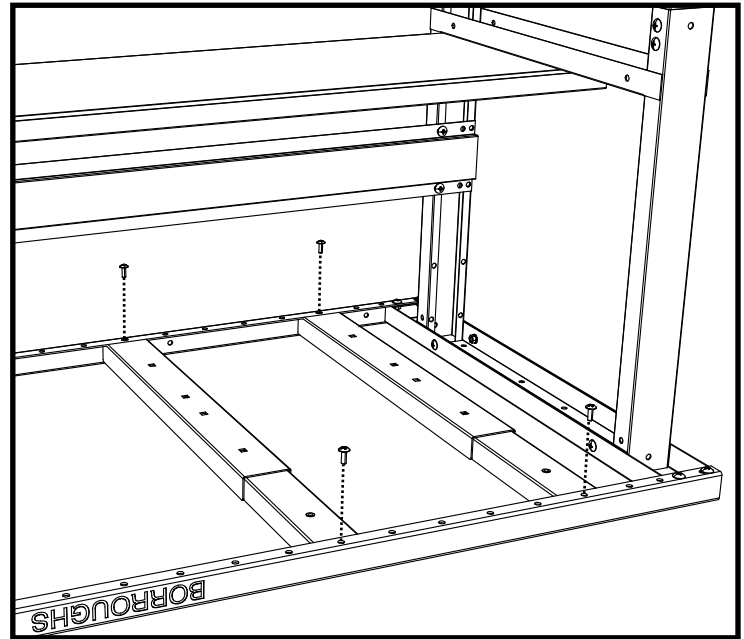


- 2** Remove the drawer from housing and place the housing on top of the brackets previously installed. Using (6) **A** bolts, attach the housing to the unit. You can now tighten all 10 bolts. For hardwood tops, use (6) **B** screws and (6) **C** washers supplied lag bolts to screw directly into the bottom of the top.

- 3** Flip the workbench upright and double check all hardware is tightened down and secure.

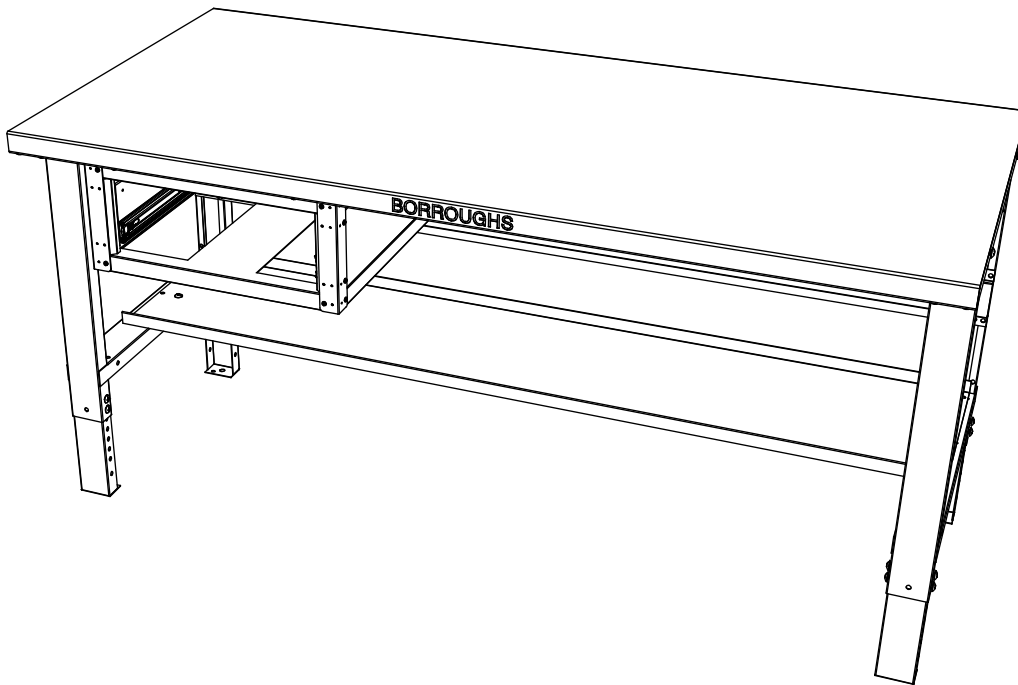

- 4** Install drawer back in housing to complete the installation of your new tier drawer.

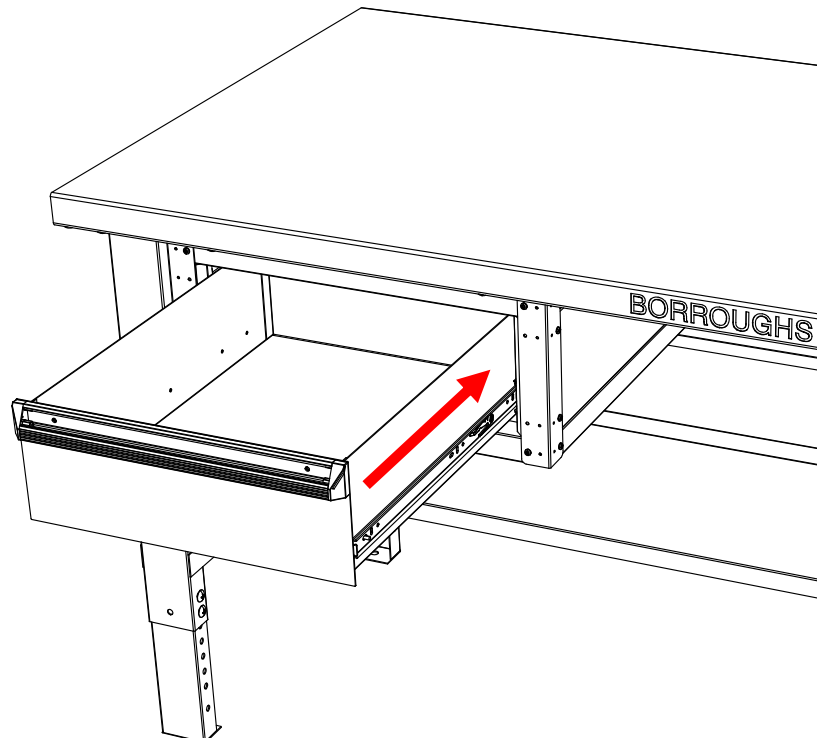



Warranty Information

Warranty

Borroughs extends to the original purchaser from the date of purchase, a 5-year limited warranty against manufacturing defects in material and workmanship. If a Borroughs product fails to perform because of a manufacturing defect, Borroughs will examine it. If found defective, it will be repaired or replaced at our option. This warranty applies only to Borroughs products acquired directly from Borroughs or from an authorized Borroughs Distributor.

This warranty does not apply to any product which has been subject to misuse, negligence, or accident; has been damaged in shipment, storage, or installation; has been misapplied or has been modified or repaired by unauthorized persons or been repaired with non-standard Borroughs replacement parts. This warranty specifically excludes claims for indirect, incidental, or consequential damages arising in any way from a product defect. This warranty is exclusive, and exists in lieu of all other warranties, either expressed or implied.

This warranty gives you specific legal rights; you may also have other rights which may vary from state to state. Contact your Borroughs Distributor to obtain warranty service. You must make a written claim. Provide a copy of your purchase record and a written description of the warranty problem with your claim.

If you are unable to contact your Distributor, contact:

**Borroughs, Customer Service Manager,
3002 N. Burdick St., Kalamazoo, MI 49004-3483.
Phone: 1-800-748-0227**